


No temporary traffic barrier on outside of travel lanes?
Revision block notes revised layout and it looks like TTB was removed on outsides.

ADA Response:
ttb on outside of travel lanes has been removed. the removal of the ttb is the revised layout. ttb was shown on the original plans and is now removed with the addendum

LIMIT OF CONSTRUCTION
PRE STAGE
STA -0+45
MATCH EXISTING PAVEMENT MARKINGS

BEGIN PROJECT 0048-0200
PRE STAGE
STA -2+06
MATCH EXISTING PAVEMENT MARKINGS

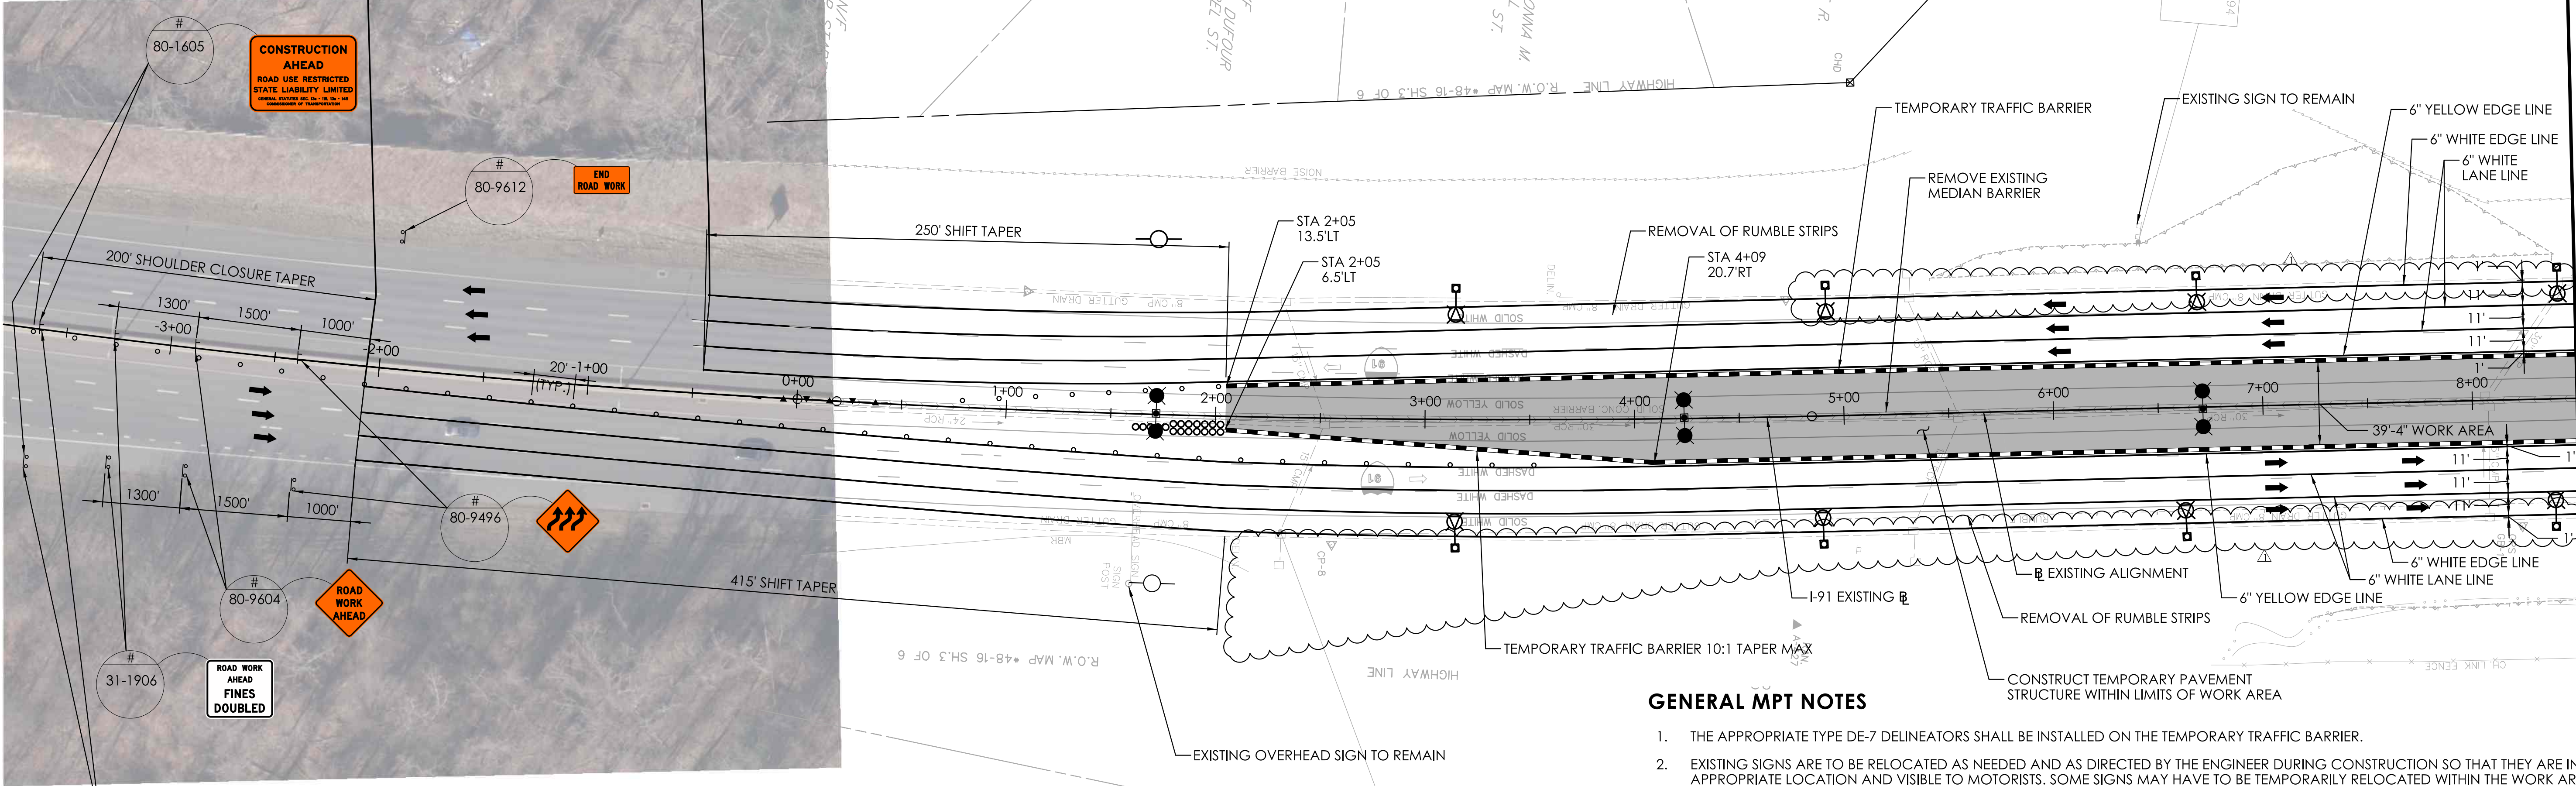

GENERAL MPT NOTES


1. THE APPROPRIATE TYPE DE-7 DELINEATORS SHALL BE INSTALLED ON THE TEMPORARY TRAFFIC BARRIER.
2. EXISTING SIGNS ARE TO BE RELOCATED AS NEEDED AND AS DIRECTED BY THE ENGINEER DURING CONSTRUCTION SO THAT THEY ARE IN THE APPROPRIATE LOCATION AND VISIBLE TO MOTORISTS. SOME SIGNS MAY HAVE TO BE TEMPORARILY RELOCATED WITHIN THE WORK AREA. THIS WORK WILL BE PAID FOR UNDER ITEM NO. 0971001A MAINTENANCE AND PROTECTION OF TRAFFIC.
3. THE LOCATIONS OF TEMPORARY SIGNS SHOWN ON THE PLANS ARE APPROXIMATE AND SHALL BE ADJUSTED IN THE FIELD BY THE CONTRACTOR TO MEET FIELD CONDITIONS.
4. ALL CONSTRUCTION SIGNS TO BE INSTALLED ON BREAKAWAY POSTS PER TRAFFIC STANDARD SHEET TR-1208_01, TR-1208_02 AND TR-1220_02.
5. ALL SIGNS USED FOR CONSTRUCTION WILL BE PAID FOR UNDER ITEM NO. 1220027A CONSTRUCTION SIGNS.
6. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE SPECIAL PROVISIONS OF SECTION 1.08 PROSECUTION AND PROGRESS AND ITEM NO. 0971001A MAINTENANCE AND PROTECTION OF TRAFFIC.
7. EXISTING SIGNS IN CONFLICT WITH TEMPORARY SIGNS SHALL BE COVERED, REMOVED OR REVISED TO MEET FIELD CONDITIONS.
8. ANY EXISTING SIGNING DAMAGED BY THE CONTRACTOR SHALL BE REPLACED AT NO COST TO THE STATE.
9. BARRICADE WARNING LIGHTS - HIGH INTENSITY SHALL BE MOUNTED ON ALL DIAMOND SHAPED POST-MOUNTED CONSTRUCTION SIGNS.
10. EXACT LOCATION OF ALL TRAFFIC CONTROL DEVICES TO BE APPROVED BY THE ENGINEER.
11. CONTRACTOR IS TO REFER TO CTDOT QUALIFIED PRODUCTS LIST (QPL) TO SELECT AN APPROVED BARREL MANUFACTURER. THE BARREL ARRAY SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S GUIDE LINES.
12. ALL TEMPORARY PAVEMENT MARKINGS SHALL BE EPOXY RESIN PAVEMENT MARKINGS UNLESS OTHERWISE NOTED ON THE PLANS.
13. EXISTING SIDE MOUNTED SIGNS AND OVERHEAD SIGNS SHALL BE COORDINATED WITH PROJECT NO. 0171-0482.
14. REFER TO HIGHWAY STAGING PLANS FOR TEMPORARY ROADWAY DETAILS.
15. CONTRACTOR SHALL CONFIRM LOCATION OF EXISTING PAVEMENT MARKINGS PRIOR TO APPLYING TEMPORARY PAVEMENT MARKINGS.

ADDENDUM NO.1

LEGEND

- CONSTRUCTION WORK AREA
- TEMPORARY SAND BARRELS - 70 MPH
- TEMPORARY TRAFFIC BARRIER
- DIRECTION OF TRAFFIC
- DOUBLE POST SIGN
- MEDIAN MOUNTED SIGN
- TRAFFIC DRUM

#40-4266L/R ATTENUATOR REFLECTOR ON 24" X 30" SHEET ALUMINUM (COST IS INCLUDED IN THE TEMPORARY SAND BARREL ITEMS)

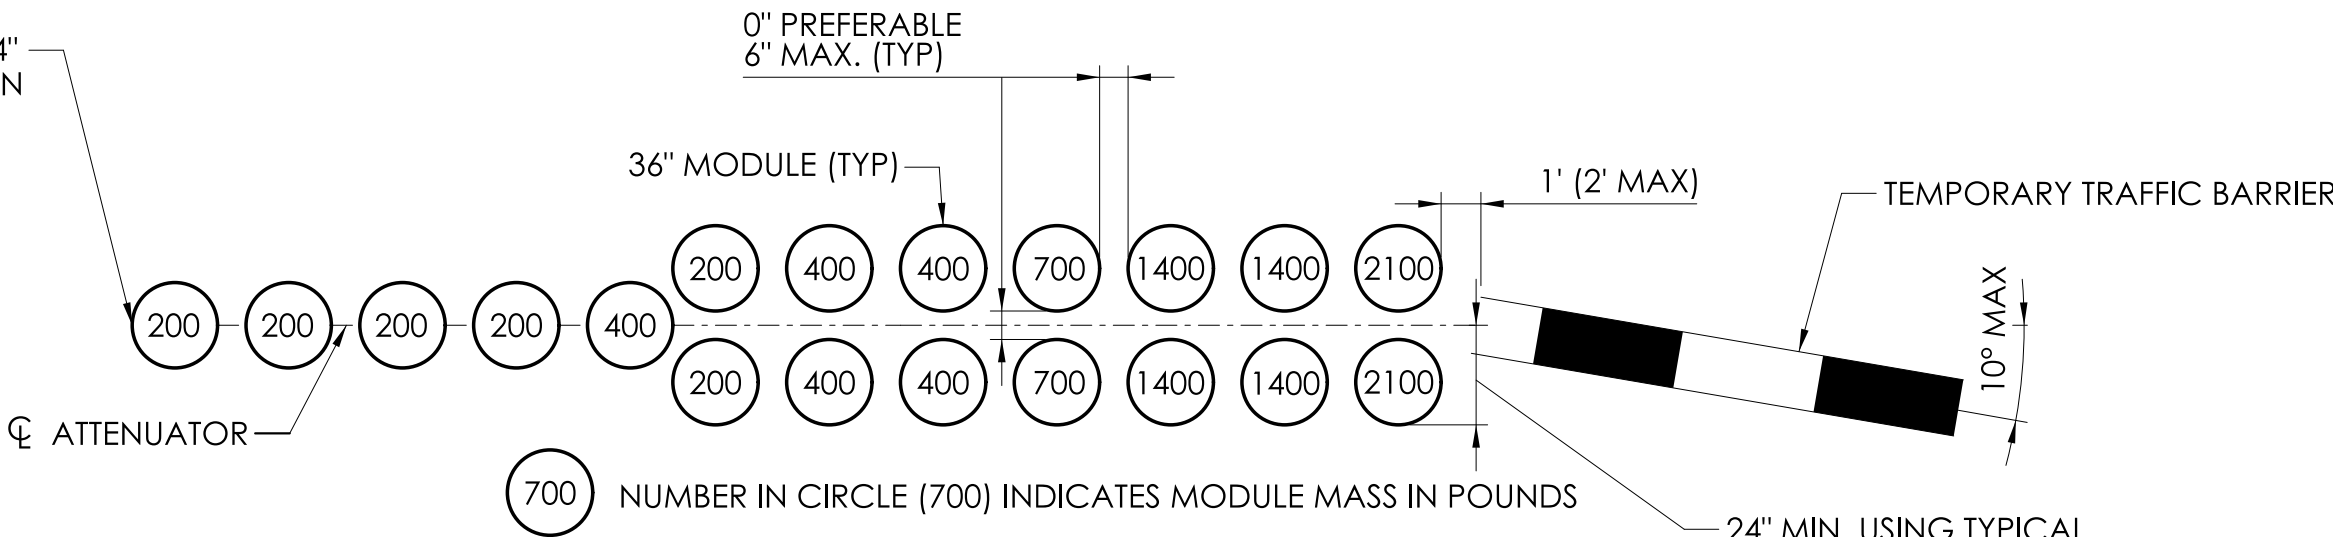


TEMPORARY SAND BARRELS DETAIL

MODULE ARRANGEMENT FOR UNDER 70 MPH
NOT TO SCALE

DESIGNER/DRAFTER: AMW CHECKED BY: JVS	SIGNATURE BLOCK: ADA A. DiCesare Associates, P.C. 690 Canton Avenue Bridgeport, CT 06604 203-366-3444 www.adicessapc.com	0 40' 80' HORIZONTAL SCALE 1" = 40'	CTDOT CONNECTICUT DEPARTMENT OF TRANSPORTATION	PROJECT TITLE: REPLACEMENT OF BRIDGE NO. 05585 - INTERSTATE 91 OVER GRAPE BROOK	TOWN(S): ENFIELD	DRAWING TITLE: PRE STAGE MPT PLAN - 01	PROJECT NO.: 0048-0200	DRAWING NO.: MPT-01 SHEET NO.: 05.02.A1


See note on MPT-01

ADA Response:
see response mpt-01

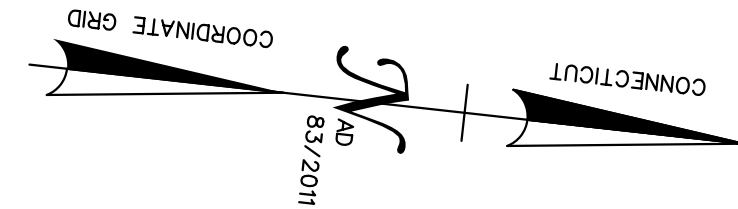

MATCH MARK - SEE DRAWING NO. MPT-01

MATCH MARK - SEE DRAWING NO. MPT-03

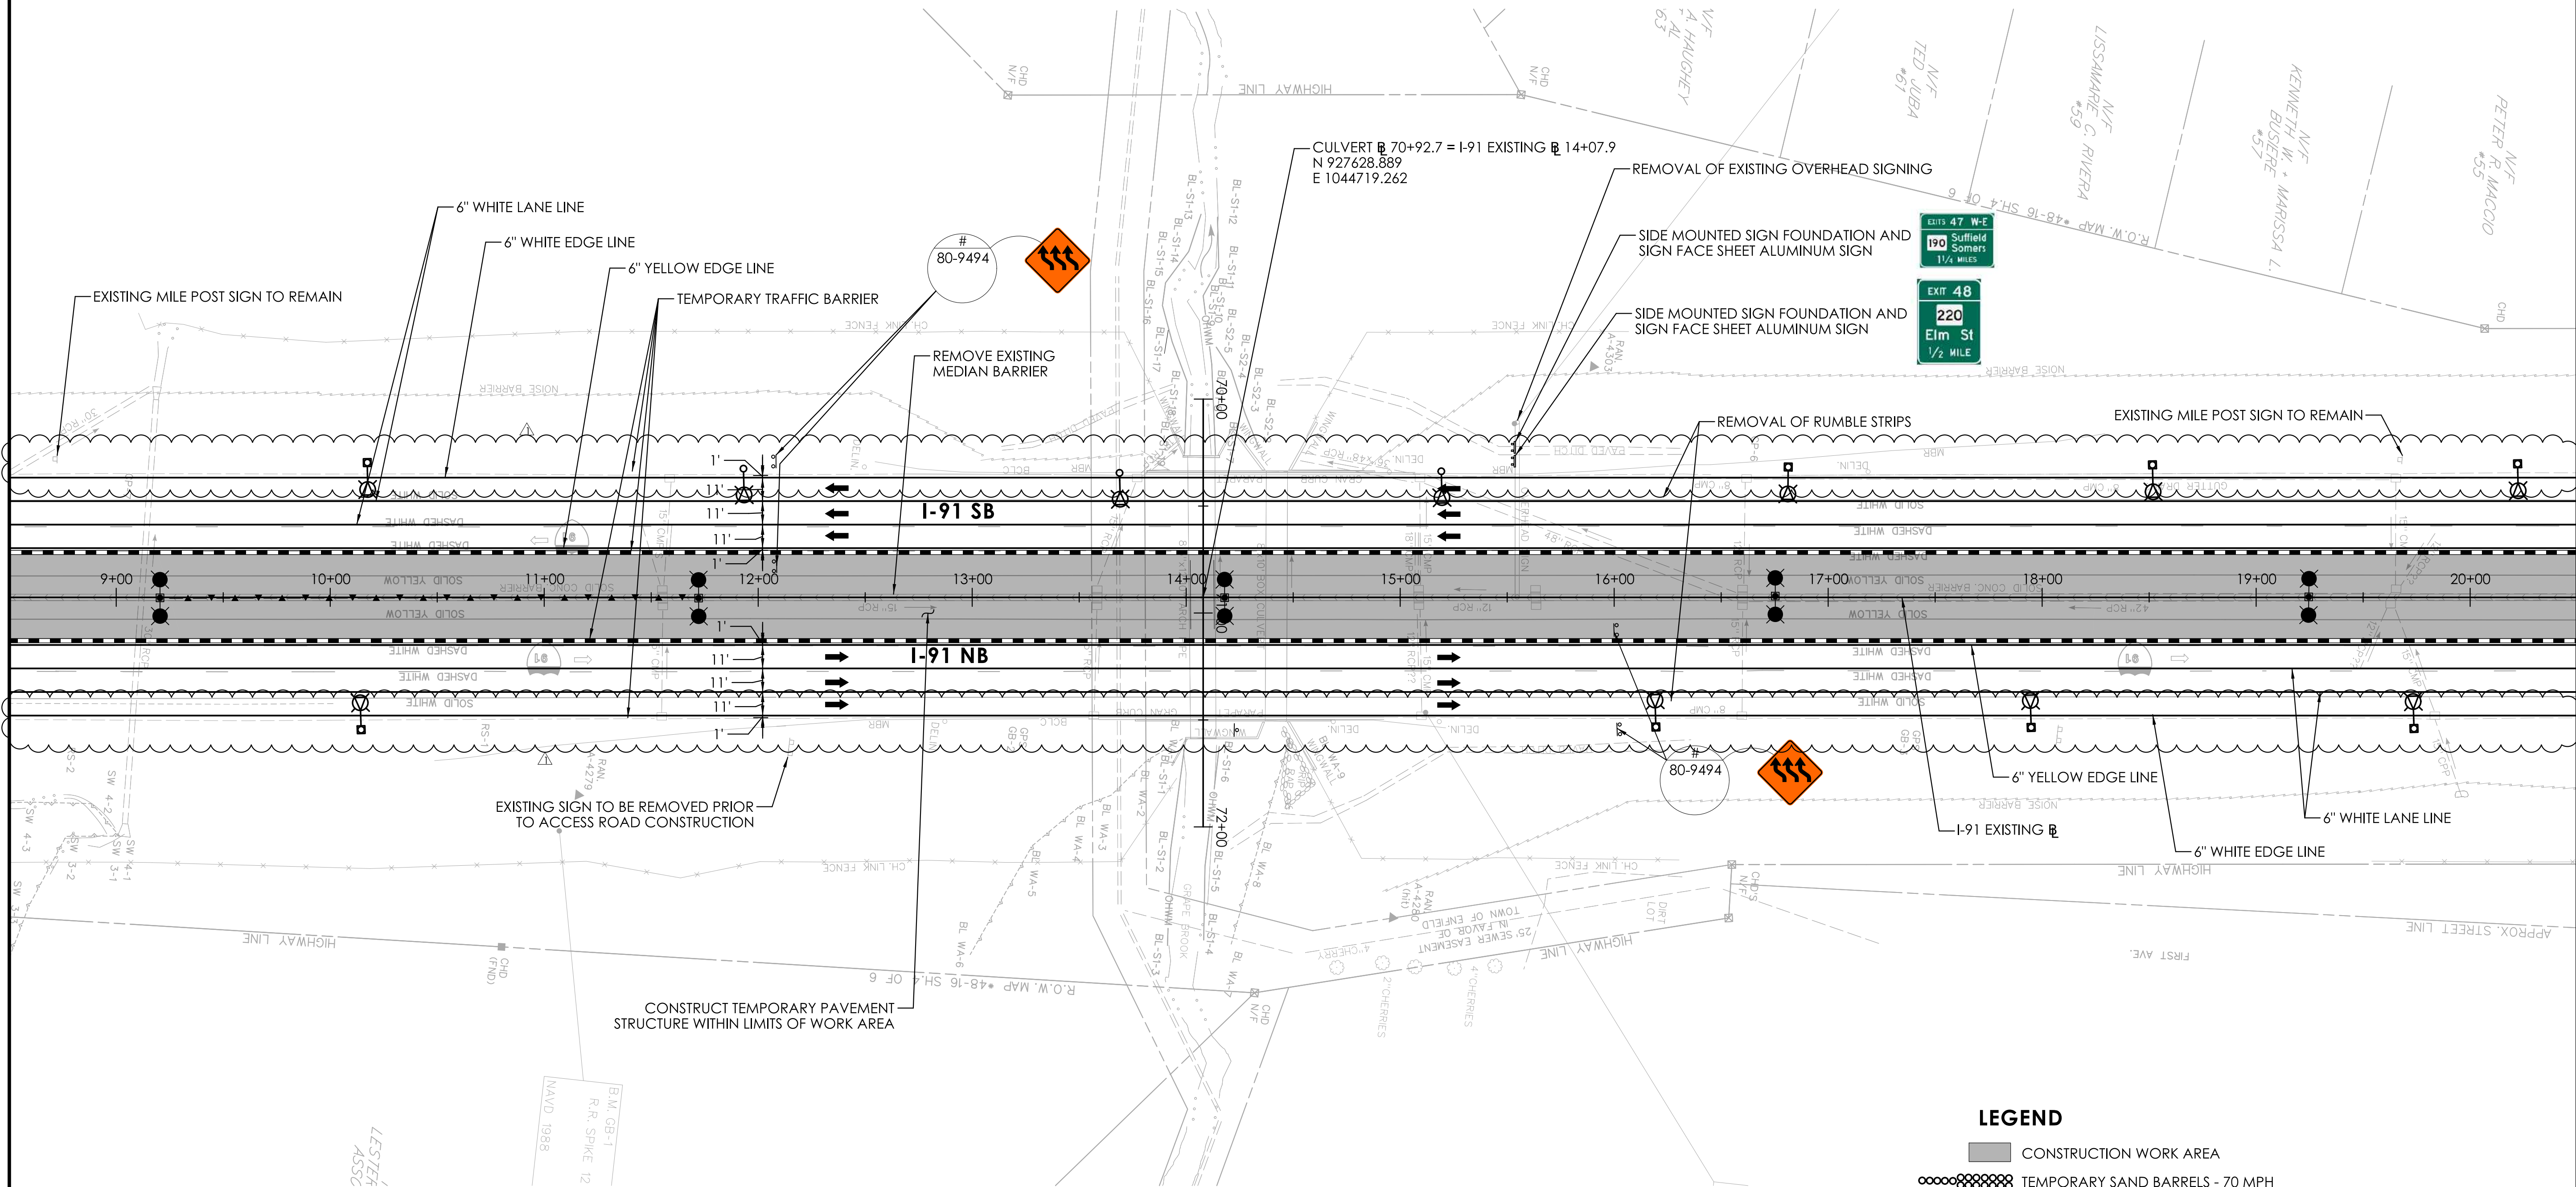

LEGEND

- CONSTRUCTION WORK AREA
- TEMPORARY SAND BARRELS - 70 MPH
- TEMPORARY TRAFFIC BARRIER
- DIRECTION OF TRAFFIC
- DOUBLE POST SIGN
- MEDIAN MOUNTED SIGN
- TRAFFIC DRUM

ADDENDUM NO.1

SIGNATURE BLOCK:		DESIGNER/DRAFTER: AMW		CHECKED BY: JVS		PROJECT TITLE:		TOWN(S):		DRAWING TITLE:		PROJECT NO.:		DRAWING NO.:	
LASTED SAVED BY: ADA034		FILE NAME: K:\CT_Projects\0048-0200\Traffic\Contract_Plan\60% Drawings\HW_CB_0048_0200_MPT_Pre Stage.dgn		PLOTTED DATE: 9/17/2025		REPLACEMENT OF BRIDGE NO. 05585 - INTERSTATE 91 OVER GRAPE BROOK		ENFIELD		PRE STAGE MPT PLAN - 02		0048-0200		MPT-02	
														SHEET NO.:	
														05.03.A1	

See note on MPT-01

ADA Response:
see response mpt-01

